



Empowering DBS & VoIP Communication Solution Provider

Web: www.gstarcom.com E-mail: info@gstarcom.com


VoIP Gateway 4 ports - Model: ATS4000

ATS-1000 is a 4 ports VoIP Gateway for Corporate and SOHO users. It is compatible with different SIP proxy and VoIP devices in the market. Full features and configuration access is by telephone key pad and turns your PSTN lifeline to a powerful 4 ports Internet telephony PBX. You can use this powerful device to make unlimited free calls to anyone who has T2Free device. Or, you can make low-cost phone calls to anyone, anywhere who doesn't have T2Free device.



ATS 400 registered on T2Free Soft Switch provides the following PBX features and managed through friendly GUI interface for subscribers.

- Greeting , Auto Attendant , Transfer
- Hold, Park , Messaging Waiting Indication
- Caller ID , Call Waiting , Hunt Group.
- Voice Mail accessible from telephone, web page or e-mail address
- Conferencing bridge, Communication Center managing Presence,
- Transfer, Call Forwarding, Speed Dial, Do Not disturb
- CDR including Incoming, Outgoing, Voice Mail etc

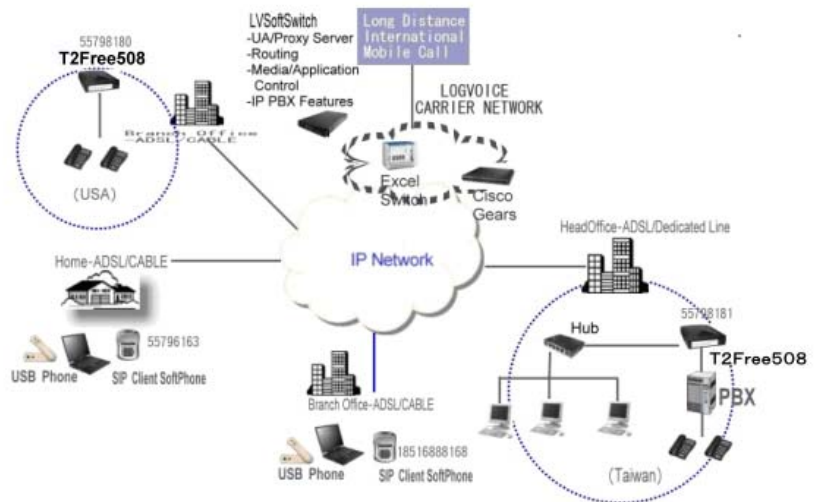

LAN Features

ATS 400 is equipped with a Ethernet port for data networking:

- IP Sharing
- DHCP/NAT
- Port Forwarding
- IP Filtering

Download the T2Free toolbars for Internet Explorer® and extend T2Free's functionality. **FOR FREE!!** , please visit the Web site: www.t2free.com

The product information and specifications are subject to change without prior notice.



Empowering DBS & VoIP Communication Solution Provider

Web: www.gstarcom.com E-mail: info@gstarcom.com

Specification :

Call Control Protocol Compliance	T2Free , SIP/RTP IETFMGCP
Voice Compression	G711u, G729a, G723
Bandwidth Management	Voice Activity Detection/Comfort Noise Generation
Analog Voice Port	2 FXS /with Echo Cancellation G168 & One PSTN line
FAX Support	T30 Auto Switch/T38 No Auto Switch
Ethernet Port	WAN & LAN 10/100Base-TX Fast Ethernet Port
QoS	Type of Service(TOS) Support
Network Protocol	TCP/IP ICMP ARP UDP TFTP RTP RTCP HTTP TELNET SNMP P PPoE DHCP
Network Management	Web-based Configuration software TFTP firmware upgraded & configuration back & store TELNET server for remote management
Security	Password protect system management terminal
LEDs	-LAN -WAN -VoIP -Line 1 -Line 2 -Power
Number of Ports	-LAN -WAN -PHONE (4 FXS RJ11) -LINE(PSTN Loop through backup for power outage) - Power
Power Supply	Output Voltage 12VAC/1.5A Input Voltage : 100-240 VAC, 50-60 Hz
Operation Temperature	0 Degree C- 50 Degree C
Humidity:	20-95%, non-condensing
Dimension	210(L)x147(W)x35(H) mm
Weight	435 g
EMI Safety	CSA/UL/EN/IEC

Download the T2Free toolbars for Internet Explorer® and extend T2Free's
functionality. **FOR FREE!!** , please visit the Web site: www.t2free.com

The product information and specifications are subject to change without prior notice.