




# G-STAR COMMUNICATIONS LTD.

## 9 Inputs P-Switch 2 SAT (with 4, 6 or 8 receivers)

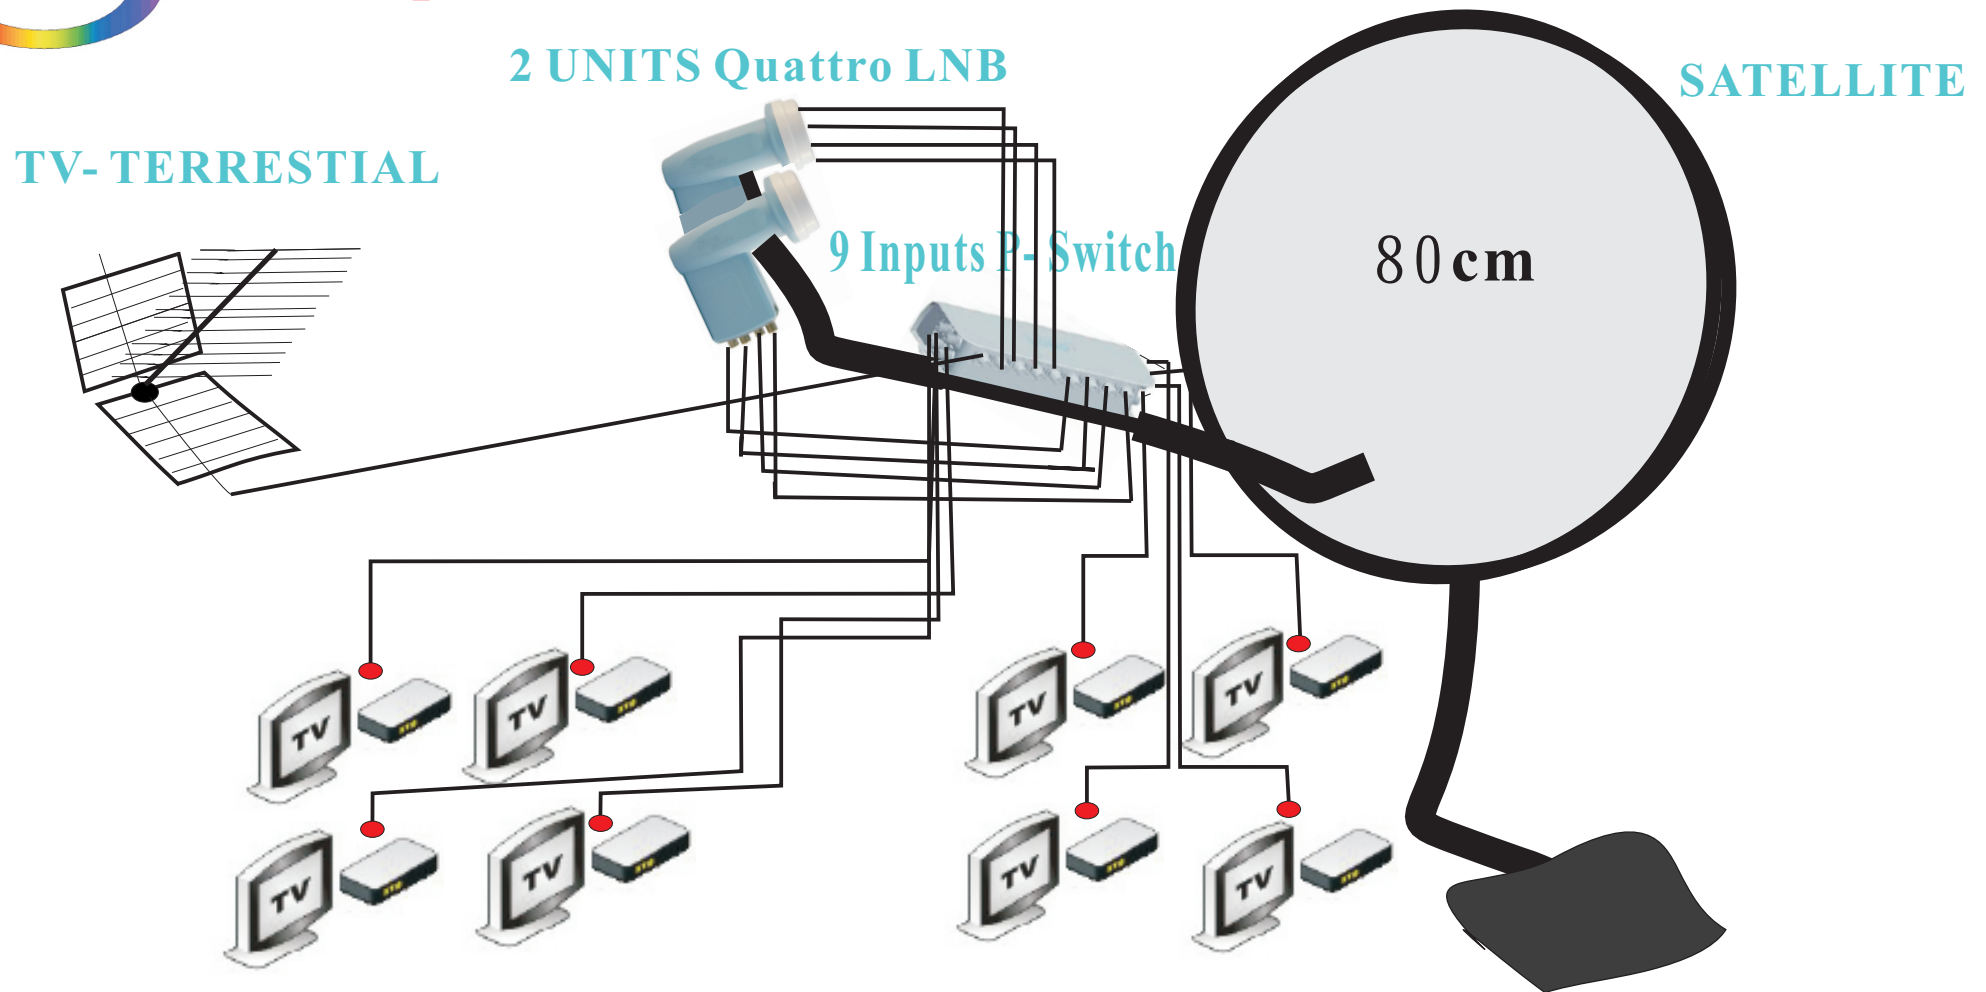


1. Solution of receiving any degree difference of spacing 2 satellite s with 4, 6 and 8 users.
2. Water proof for Out Door Installation.
3. **No need AC power input connection.**
4. Reduce the cable loss to minimum for best TV signal quality reception.
5. **Compliant with Environmental Protect, power consumption solution is fairly low only 50mA for one active Satellite Receiver. There is no any current consumption while the receiver is "off" or "stand by" mode.**



## G-STAR COMMUNICATIONS LTD.

### *13 Inputs P-Switch 3 SAT (with 4, 6 or 8 receivers)*

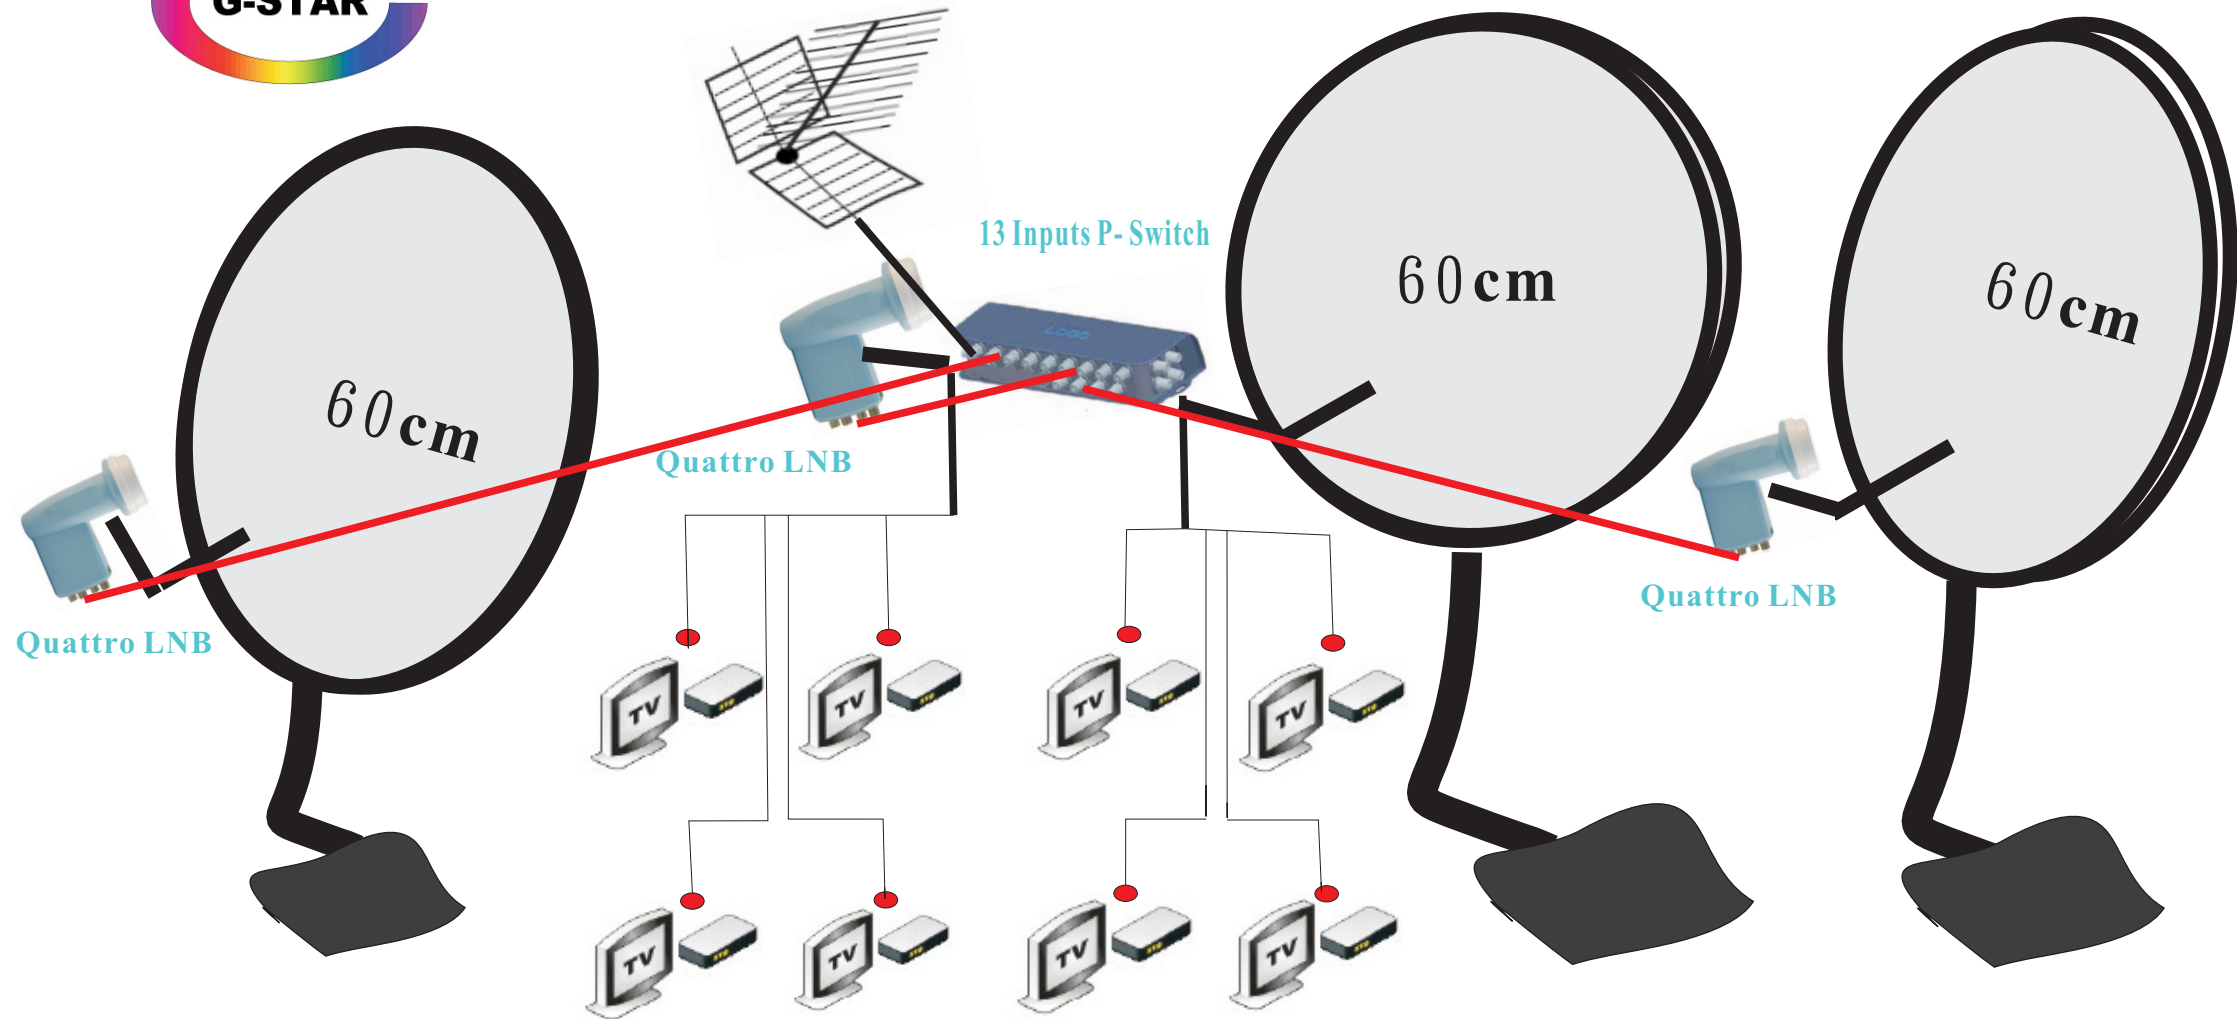


1. Solution of receiving any degree difference of spacing 3 satellite s.
2. Water proof for Out Door Installation.
3. No need AC power input connection.
4. Reduce the cable loss to minimum for best TV signal quality reception.
5. Compliant with Environmental Protect, power consumption solution is fairly low only 50mA for one active Satellite Receiver. There is no any current consumption while the receiver is "off" or "stand by" mode.



## G-STAR COMMUNICATIONS LTD.

*17 Inputs P-Switch 4 SAT (with 4, 6 or 8 receivers)*

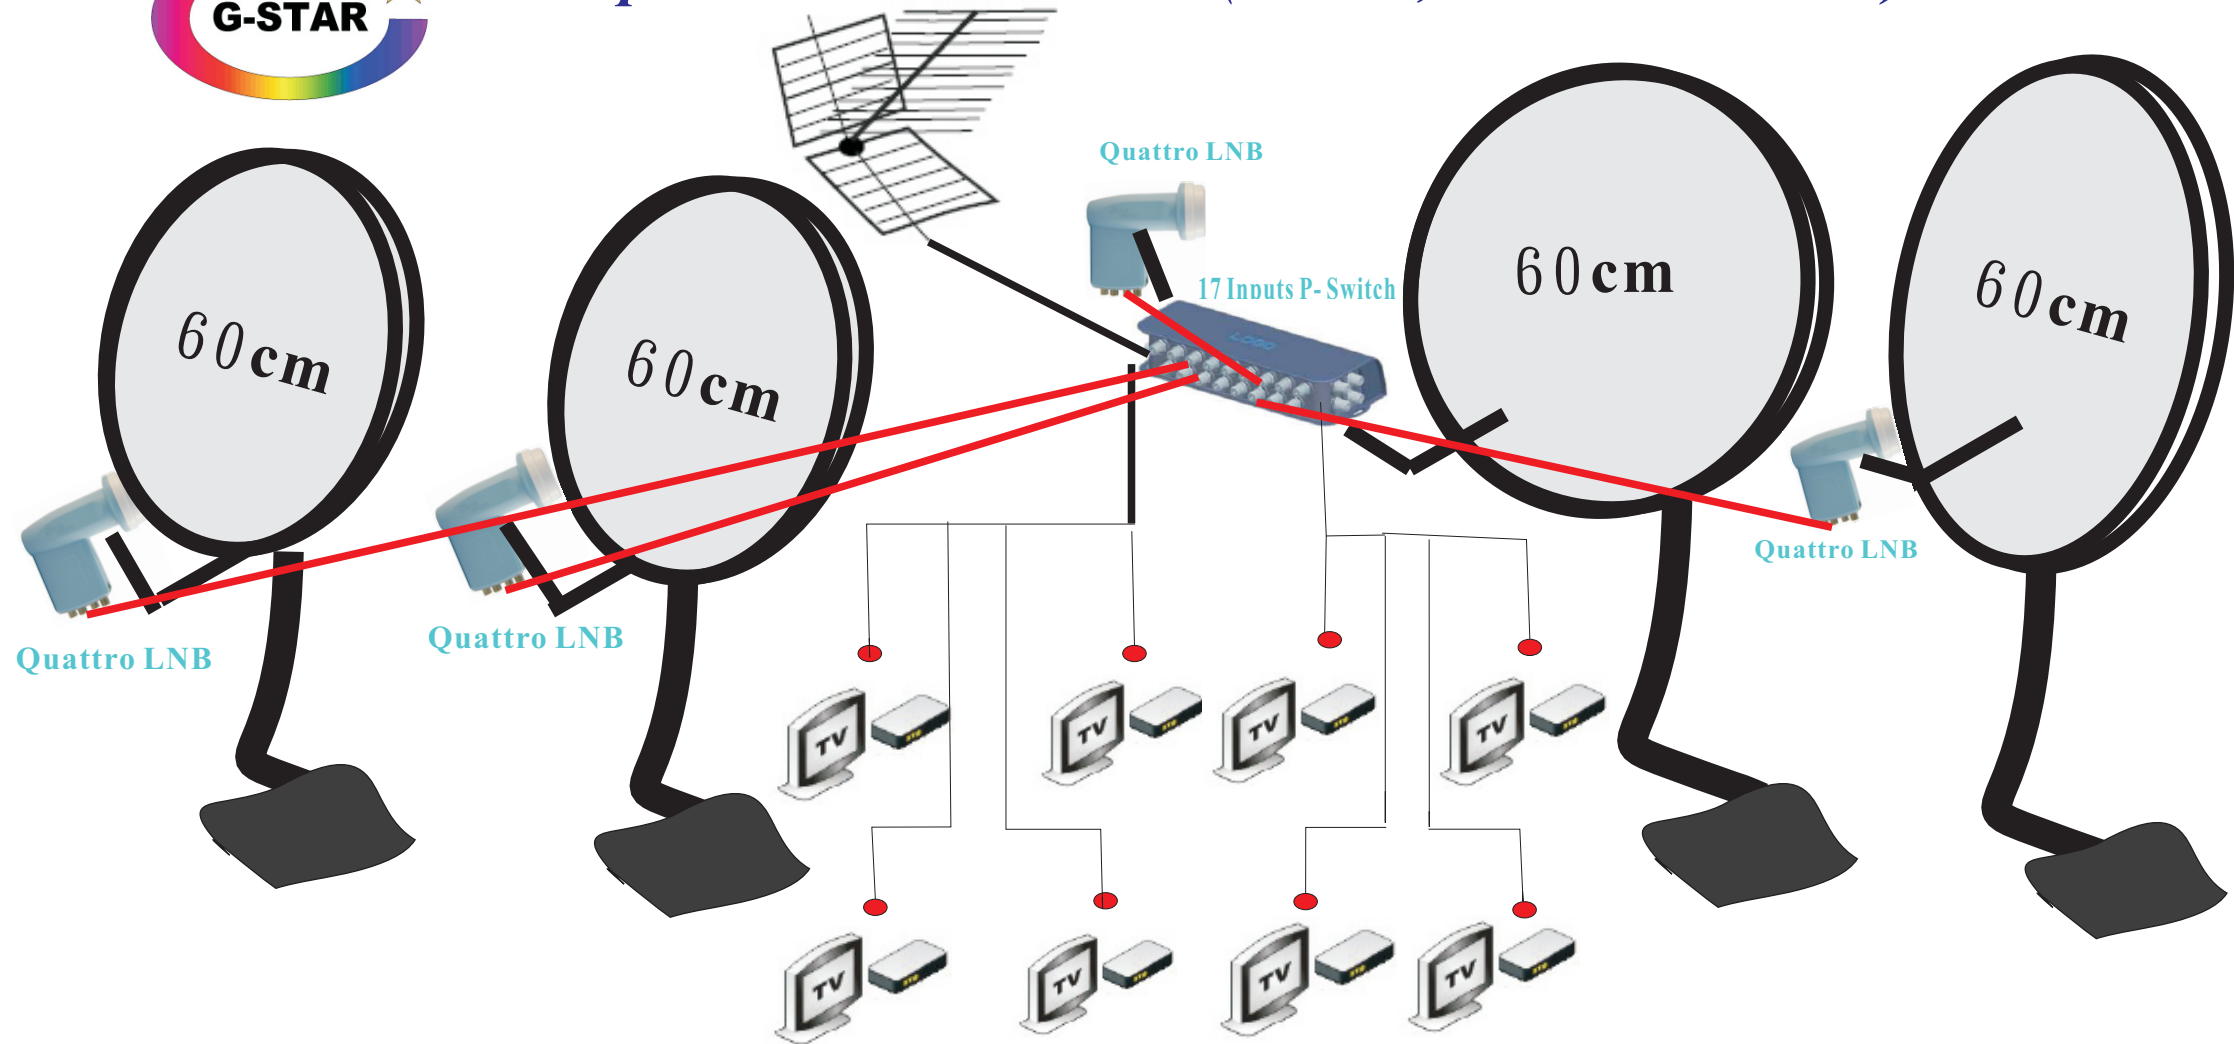

1. Solution of receiving any degree difference of spacing 4 satellite s.
2. Water proof for Out Door Installation.
3. **No need AC power input connection.**
4. Reduce the cable loss to minimum for best TV signal quality reception.
5. **Compliant with Environmental Protect, power consumption solution is fairly low only 50mA for one active Satellite Receiver. There is no any current consumption while the receiver is "off" or "stand by" mode.**



# G-STAR COMMUNICATIONS LTD.

www.gstarcom.net



## GP-98-SP

### P-Switch

<b>Receiver Power Switch Model Name</b>		<b>GP-98-SP/GP-96-SP/GP-94-SP</b>			
<b>NO. of Inputs</b>	<b>SAT/IF</b>		<b>8</b>		
	<b>Terr.</b>		<b>1</b>		
<b>NO. of Outputs</b>	<b>Receiver Users</b>		<b>8/6/4</b>		
<b>Frequency</b>	<b>SAT/IF</b>		<b>950-2250 MHz</b>		
	<b>Terr.</b>		<b>47-862 MHz</b>		
<b>Max Output Power Level</b>	<b>SAT/IF</b>		<b>105 dBμV</b>		
<b>Output Loss</b>	<b>Receiver</b>	<b>SAT/IF</b>		<b>0-3 dB</b>	<b>0-3 dB</b>
		<b>Terr</b>	<b>Passive</b>	<b>20 dB</b>	<b>20 dB</b>
<b>Isolation</b>	<b>Sat / Terr.</b>		<b>30 dB</b>		
	<b>Terr. / Sat</b>		<b>25 dB</b>		
	<b>Sat / Sat</b>		<b>30 dB</b>		
	<b>Vert./Hor.</b>		<b>30 dB</b>		
<b>Power Source</b>	<b>Satellite Receiver</b>				
<b>Dimension</b>	<b>24.8 x 7.6 x 4.4cm</b>				
<b>Weight</b>	<b>332g</b>				



# G-STAR COMMUNICATIONS LTD.

[www.gstarcom.net](http://www.gstarcom.net)



## GP-138-SP

P-Switch

<b>Receiver Power Switch Model Name</b>		<b>GP-138/GP-136/GP-134</b>			
<b>NO. of Inputs</b>	<b>SAT/IF</b>		<b>12</b>		
	<b>Terr.</b>		<b>1</b>		
<b>NO. of Outputs</b>	<b>Receiver Users</b>		<b>8/6/4</b>		
	<b>Frequency</b>		<b>SAT/IF</b>		<b>950-2250 MHz</b>
		<b>Terr.</b>		<b>47-862 MHz</b>	
<b>Max Output Power Level</b>	<b>SAT/IF</b>		<b>105 dB<math>\mu</math>V</b>		
	<b>Output Loss</b>	<b>Receiver</b>	<b>SAT/IF</b>		<b>0-3 dB</b>
<b>Terr</b>			<b>Passive</b>	<b>20 dB</b>	<b>20 dB</b>
<b>Isolation</b>	<b>Sat / Terr.</b>		<b>30 dB</b>		
	<b>Terr. / Sat</b>		<b>25 dB</b>		
	<b>Sat / Sat</b>		<b>30 dB</b>		
	<b>Vert./Hor.</b>		<b>30 dB</b>		
<b>Power Source</b>	<b>Satellite Receiver</b>				
<b>Dimension</b>	<b>24.8 x 7.6 x 4.4cm</b>				
<b>Weight</b>	<b>346g</b>				



# G-STAR COMMUNICATIONS LTD.

www.gstarcom.net



## GP-178-SP

### P-SWITCH

<b>Receiver Power Switch Model Name</b>		<b>GP-178/GP-176/GP-174</b>			
<b>NO. of Inputs</b>	<b>SAT/IF</b>		<b>16</b>		
	<b>Terr.</b>		<b>1</b>		
<b>NO. of Outputs</b>	<b>Receiver Users</b>		<b>8/6/4</b>		
	<b>Frequency</b>		<b>950-2250 MHz</b>		
		<b>Terr.</b>		<b>47-862 MHz</b>	
<b>Max Output Power Level</b>	<b>SAT/IF</b>		<b>105 dB<math>\mu</math>V</b>		
	<b>Output Loss</b>	<b>Receiver</b>	<b>SAT/IF</b>		<b>0-3 dB</b>
<b>Terr</b>			<b>Passive</b>	<b>20 dB</b>	<b>20 dB</b>
<b>Isolation</b>	<b>Sat / Terr.</b>		<b>30 dB</b>		
	<b>Terr. / Sat</b>		<b>25 dB</b>		
	<b>Sat / Sat</b>		<b>30 dB</b>		
	<b>Vert./Hor.</b>		<b>30 dB</b>		
<b>Power Source</b>	<b>Satellite Receiver</b>				
<b>Dimension</b>	<b>24.8 x 7.6 x 4.4cm</b>				
<b>Weight</b>	<b>360g</b>				